

# FOOD AND BEVERAGE

**The products you need to accurately analyze chemical parameters in food and beverages**

Food and beverage producers face increasing safety regulations, and are required to perform detailed analyses of raw materials, in-process controls, quality tests, and hygiene monitoring. As all of these analyses take time, our rapid and on-the-spot tests are designed to help you get your product to the market faster.

This brochure highlights products you need to accurately analyze important chemical parameters in food and beverages, such as the concentration of ascorbic acid, glucose and fructose, or microbiological contamination.





# food & beverage WORKFLOW

## Input




Raw material QC

## Preparation



## In-Process

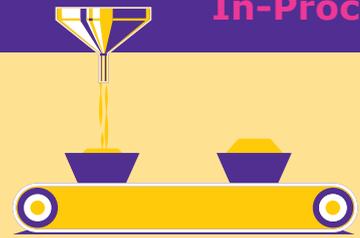

Processing

## Quality Control

### Chromatography

- HPLC, GC, TLC  
> Page 10
- Solvents



### Spectrophotometry

- Spectroquant® Prove 600  
> Page 4
- Spectroquant® test kits, e.g. calcium, nitrate, sulfite  
> Page 6



### Reference materials

- Certipur®  
> Page 12



### Microbial testing

- Dehydrated culture media  
> Page 20



### Ingredient and nutritional testing

- Kjeldahl, total dietary fiber  
> Page 12
- Karl Fischer - reagents  
> Page 13



## Output



Filling



Product QC



## In-Process Control

### Semi-quantitative testing

- pH strips and paper  
> [Page 18](#)
- MQuant™ test strips,  
e.g. free fatty acids  
> [Page 16](#)



### Microbial testing

- Air sampler,  
e.g. MAS-family  
> [Page 20](#)



### Quantitative testing

#### Test strips

- RQflex® 10  
> [Page 14](#)
- Reflectoquant® test kits e.g. HMF,  
glucose, sucrose, ascorbic acid  
> [Page 15](#)
- Spectroquant® test kits,  
e.g. iron, magnesium, sulfite  
> [Page 6](#)



### Reference materials

- Certipur®  
> [Page 12](#)



# SPECTROQUANT® PROVE INSTRUMENTS JUST PROVE IT

## Test now and... see yourself

In combination with the Spectroquant® Test Kits you can leverage the full potential of this new instrument! With a small footprint, ergonomic design and robust material, it fits perfectly to your lab environment.



### Safe & Convenient:

- Live ID provides the method and selects the right settings. Test-specific lot and expiry data are saved with each result.
- Direct insertion of round cell tests without opening any lids.

### Robust & Easy-to-clean:

- Materials and design of Spectroquant® Prove are engineered to last and resistant to most chemicals used in labs.
- Removable cell holder allows easy cleaning.

# SPECTROQUANT® PROVE SPECTROPHOTOMETERS

Three perfect models. Just choose.

## 100



## 300



## 600



### Spectroquant® Prove 100 Cat. No. 4-1.73016.0001

#### For routine applications

Prove 100 is the best choice for those who primarily use our broad range of Spectroquant® test kits, or only perform Vis measurements. High quality and great value for money for your daily analyses.

### Spectroquant® Prove 300 Cat. No. 4-1.73017.0001

#### For sensitive measurements

Thanks to its long-lasting xenon lamp, Prove 300 is ideal for more intensive use. What's more, it is capable of both UV and Vis measurements, so you have greater flexibility for more intricate analyses.

### Spectroquant® Prove 600 Cat. No. 4-1.73018.0001

#### For complex analyses

Designed for high-end UV/Vis optics, and cells of up to 100 mm, Prove 600 packs great power into a compact size. Excellent resolution and sensitivity for use with test kits, complex kinetics or spectral measurements.

Specifications		Prove		
		100	300	600
Measuring Technology	Spectrophotometer with reference beam technology	■	■	■
Wavelength Range	Vis (320 – 1,100 nm)	■	■	■
	UV (190 – 320 nm)		■	■
Lamp Type	Tungsten halogen lamp	■		
	Xenon flash lamp		■	■
Ambient Light Protection	Measurement with open shaft possible due to proprietary solution (patent pending)	■	■	■
Spectral Bandwidth	4 nm	■	■	
	1.8 nm			■
Smart Screen Display	Resistive touch screen	■	■	
	P-cap glass touch screen			■
Live ID System	2-D Barcode recognition for cell tests and reagent tests	■	■	■
	Barcode contains lot, expiry, and calibration data. Data stored with each measurement	■	■	■
Cell Size	16 mm round cells, 10, 20 and 50 mm rectangular cells with automatic recognition	■	■	■
	100 mm rectangular cells with automatic recognition			■
Cell Holder	Removable for easy cleaning	■	■	■
Methods	Programmed methods of all Spectroquant® cell and reagent tests, 99 user defined methods, 20 profiles for kinetics and absorbance scans each	■	■	■
Applications	Free preprogrammed applications: Bromate, Brewery packages (MEBAK/EBC/ASBC methods), Sugar (ICUMSA), Oil (DOBI, olive oil)	■	■	■
AQA Prime	Individual settings for all methods in AQA 1 (instrument check) and AQA 2 mode (system check) and pipette check	■	■	■
Sample Matrix Check	Easy access through setting menu to perform instrument supported matrix check for each method	■	■	■
Software Updates	Free method updates on our website	■	■	■
Languages	Navigation in 28 built-in languages	■	■	■
Communication Interfaces	USB: 2 x USB-A (for printer, USB memory devices, keyboard or barcode reader), 1 x USB-B; Ethernet: LAN connection	■	■	■

# SPECTROQUANT® TEST KITS

## Parameters A-Z

	Parameter	Measuring Range of the Spectroquant® Prove Instruments [mg/L]	Citation Form	No. of Tests	Method
<b>USEPA</b>	Ammonium Cell Test	0.010 – 2.000 0.01 – 2.58 0.010 – 2.000 0.01 – 2.43	NH4-N NH4 NH3-N NH3	25	Indophenol Blue
<b>USEPA</b>	Ammonium Test	0.010 – 3.00 0.013 – 3.86 0.010 – 3.00 0.016 – 3.65	NH4-N NH4 NH3-N NH3	250	Indophenol Blue
<b>USEPA</b>	Ammonium Cell Test	0.20 – 8.00 0.26 – 10.30 0.20 – 8.00 0.24 – 9.73	NH4-N NH4 NH3-N NH3	25	Indophenol Blue
<b>USEPA</b>	Ammonium Test	2.0 – 150 2.6 – 193 2.0 – 150 2.4 – 182	NH4-N NH4 NH3-N NH3	100	Indophenol Blue
<b>USEPA</b>	Ammonium Cell Test	4.0 – 80.0 5.2 – 103.0 4.0 – 80.0 4.9 – 97.3	NH4-N NH4 NH3-N NH3	25	Indophenol Blue
	Calcium Test	0.20 – 4.00	Ca	100	Phthalein Derivate
	Chloride Test	0.10 – 5.00	Cl	100	Iron(III)-Thiocyanate
	Chloride Cell Test	0.5 – 15.0	Cl	25	Iron(III)-Thiocyanate
	Chloride Test	2.5 – 250	Cl	100	Iron(III)-Thiocyanate
	Chloride Cell Test	5 – 125	Cl	25	Iron(III)-Thiocyanate
	Chromate Test C) for the Determination of Chromium (VI)	0.010 – 3.00 0.02 – 6.69	Cr CrO4	250	Diphenylcarbazide
<b>USEPA</b>	Chromate Cell Test for the Determination of Chromium (VI) and Chromium (Total)	0.05 – 2.00 0.11 – 4.46	Cr CrO4	25	Diphenylcarbazide
<b>USEPA</b>	COD Cell Test	500 – 10,000	COD	25	Oxidation with Chromosulfuric Acid, Determination as Chromium(III)
<b>USEPA</b>	COD Cell Test	5,000 – 90,000	COD	25	Oxidation with Chromosulfuric Acid, Determination as Chromium(III)
<b>USEPA</b>	COD Cell Test for Seawater / High Chloride Contents	50 – 3,000	COD	25	Oxidation with Chromosulfuric Acid, Determination as Chromium(III)

Reference to Norms and Standards / Comments	Pipette Volume [mL]	Cell Size [mm]	Accuracy [mg/L]	Areas of Application	Cat. No.
Analogous EPA 350.1, APHA 4500-NH3 F, ISO 7150-1, DIN 38406-5	5	-	±0.050	Food Testing	<b>4-1.14739.0001</b>
Analogous EPA 350.1, APHA 4500-NH3 F, ISO 7150-1, DIN 38406-5	0.6 + 5.0	10, 20, 50	±0.016	Food Testing	<b>4-1.14752.0002</b>
Analogous EPA 350.1, APHA 4500-NH3 F, ISO 7150-1, DIN 38406-5	1	-	±0.19	Food Testing	<b>4-1.14558.0001</b>
Analogous EPA 350.1, APHA 4500-NH3 F, ISO 7150-1, DIN 38406-5	0.1 + 0.2 + 5.0	10	±1.7	Food Testing	<b>4-1.00683.0001</b>
Analogous EPA 350.1, APHA 4500-NH3 F, ISO 7150-1, DIN 38406-5	0.1	-	±1.9	Food Testing	<b>4-1.14559.0001</b>
-	0.5 + 5.0	10	±0.11	Beverages	<b>4-1.00049.0001</b>
Analogous EPA 325.1, APHA 4500-CI- E	0.20 + 10	50	±0.10	Food Testing	<b>4-1.01807.0007</b>
Analogous EPA 325.1, APHA 4500-CI- E	0.25 + 10	-	±0.3	Food Testing	<b>4-1.01804.0007</b>
Analogous EPA 325.1, APHA 4500-CI- E	1.0 + 5.0 + 0.5 + 2.5	10	±1.0	food Testing	<b>4-1.14897.0007</b>
Analogous EPA 325.1, APHA 4500-CI- E	0.5 + 1.0	-	±5	Food Testing	<b>4-1.14730.0007</b>
Analogous APHA 3500-Cr B, DIN 38405-24	5	10, 20, 50	±0.012	Milk Dairy Products	<b>4-1.14758.0001</b>
Analogous APHA 3500-Cr B, DIN 38405-25	5.0 (+10)	-	±0.04	Milk Dairy Products	<b>4-1.14552.0001</b>
Analogous EPA 410.4, APHA 5220 D, ASTM D1252-06B, ISO 15705	1	-	±143	Beverages, Food Testing, Milk Dairy Products	<b>4-1.14555.0007</b>
Analogous EPA 410.4, APHA 5220 D, ASTM D1252-06B, ISO 15705	0.1	-	±1,151	Beverages, Food Testing, Milk Dairy Products	<b>4-1.01797.0007</b>
Chloride depletion method corresponds to DIN 38409-41-2, method corresponds to DIN ISO 15705, analogous EPA 410.4, APHA 5220 D and ASTM D1252-06 B	20 + 25 + 3.0	-	±44	Beverages	<b>4-1.17059.0007</b>

# SPECTROQUANT® TEST KITS

## Parameters A-Z

Parameter	Measuring Range of the Spectroquant® Prove Instruments [mg/L]	Citation Form	No. of Tests	Method
Hydrogen Peroxide Test	0.015 – 6.00	H2O2	100	Neocuproin
Hydrogen Peroxide Cell Test	2.0 – 20.0 0.25 – 5.00	H2O2 H2O2	25	Titanyl Sulfate
Iron Test	0.0005 – 0.0100* 0.0025 – 5.00* 0.005 – 5.00	Fe	250	Triazine
Iron Test	0.010 – 5.00	Fe	150	1,10-Phenanthroline
Iron Cell Test	0.05 – 4.00	Fe	25	Triazine
Lead Cell Test	0.10 – 5.00	Pb	25	PAR
Nickel Test	0.02 – 5.00	Ni	250	Dimethylglyoxime
Nickel Cell Test	0.10 – 6.00	Ni	25	Dimethylglyoxime
Nitrogen (Total) Cell Test	0.5 – 15.0	N	25	Koroleff Digestion, 2,6-Dimethylphenol
Nitrogen (Total) Cell Test	0.5 – 15.0	N	25	Koroleff Digestion, Nitrospectral
Nitrogen (Total) Cell Test	10 – 150	N	25	Koroleff Digestion, 2,6-Dimethylphenol
Phosphate Test (Ortho-phosphate)	1.0 – 100.0 3 – 307 2 – 229	PO4-P PO4 P2O5	100	Phosphomolybdenum Blue
Potassium Cell Test	5.0 – 50.0	K	25	Kalignost®, Turbidimetric
Sulfite Cell Test	0.8 – 16.00 1.0 – 20.00 0.05 – 3.00 0.04 – 2.40	SO2 SO3 SO3 SO2	25	Ellman's Reagent
Sulfite Test	1.0 – 60.0 0.8 – 48.0	SO3 SO2	150	Ellman's Reagent

**USEPA**

\* With Prove 600

Reference to Norms and Standards / Comments	Pipette Volume [mL]	Cell Size [mm]	Accuracy [mg/L]	Areas of Application	Cat. No.
-	8.0 + 0.5	10, 20	±0.033	Beverages, Food Testing, Milk Dairy Products	<b>4-1.18789.0001</b>
Analogous DIN 38409-15 for determinations in the low measuring range see manual of instrument	10 10	- 50	±0.9	Beverages, Food Testing, Milk Dairy Products	<b>4-1.14731.0001</b>
-	5	100 100 10, 20, 50	±0.014	Food Testing	<b>4-1.14761.0002</b>
Differentiation between Fe(II) and Fe(III) possible, analogous APHA 3500-Fe B, DIN 38406-1	0.5 + 8.0	10, 20, 50	±0.024	Food Testing	<b>4-1.00796.0007</b>
-	5	-	±0.06	Food Testing	<b>4-1.14549.0001</b>
-	5	-	±0.08	Food Testing	<b>4-1.14833.0001</b>
-	5	10, 20, 50	±0.03	Beverages	<b>4-1.14785.0007</b>
-	5	10, 20, 50	±0.11	Beverages	<b>4-1.14554.0001</b>
Digestion analogous DIN EN ISO 11905-1, determination analogous DIN 38405-9	1.0 + 10	-	±0.5	Milk Dairy Products	<b>4-1.00613.0001</b>
Digestion analogous to DIN EN ISO 11905-1	1.5 + 10	-	±0.6	Milk Dairy Products	<b>4-1.14537.0001</b>
Digestion analogous DIN EN ISO 11905-1, determination analogous DIN 38405-9	1.0 + 9.0	-	±5.0	Milk Dairy Products	<b>4-1.14763.0001</b>
Analogous EPA 365.2+3, APHA 4500-P E, DIN EN ISO 6878	0.5 + 8.0	10	±1.4	Food Testing	<b>4-1.00798.0007</b>
-	2	-	±2.2	Food Testing	<b>4-1.14562.0001</b>
For determinations of the low measuring range see manual Prove	3.0 + 7.0	- 50 50	±0.4	Beverages, Food Testing	<b>4-1.14394.0001</b>
-	2.0 + 3.0 + 5.0	-	±1.0	Beverages, Food Testing	<b>4-1.01746.0001</b>

# ANALYTICAL CHROMATOGRAPHY

Do you need to separate the compounds in your sample, or require more detailed investigation? We offer a wide range of advanced chromatography and sample preparation products to support your application.

## HPLC columns for different separations

- Chromolith®: Low pressure, fast analysis, long column lifetime
- Purospher® Star: Excellent peak symmetry, high separation efficiency, extended pH stability, batch-to-batch reproducibility
- SeQuant® ZIC®-HILIC and ZIC®-CILIC: Superior selectivity for separating polar hydrophilic compounds



## Thin layer chromatography from the world leader

Coating Material	Format [cm]	Layer Thickness	Content	Backing	Cat. No.
TLC Silica Gel 60 F254	20 x 20	250 µm	25 Plates	Glass	<b>4-1.05715.0001</b>
	10 x 20	250 µm	50 Plates	Glass	<b>4-1.05729.0001</b>
	5 x 20	250 µm	100 Plates	Glass	<b>4-1.05714.0001</b>
	5 x 10	250 µm	200 Plates	Glass	<b>4-1.05719.0001</b>
	2.5 x 7.5	250 µm	500 Plates	Glass	<b>4-1.15341.0001</b>
	2.5 x 7.5	250 µm	100 Plates	Glass*	<b>4-1.05794.0001</b>
	2.5 x 7.5	250 µm	100 Plates	Glass**	<b>4-1.15327.0001</b>
	20 x 20	200 µm	25 Sheets	Aluminum	<b>4-1.05554.0001</b>
TLC Silica Gel 60	5 x 20	200 µm	100 Sheets	Aluminum	<b>4-1.05534.0001</b>
	20 x 20	200 µm	25 Sheets	Plastic	<b>4-1.05735.0001</b>
TLC Silica Gel 60	20 x 20	250 µm	25 Plates	Glass	<b>4-1.05721.0001</b>
	20 x 20	200 µm	25 Sheets	Aluminum	<b>4-1.05553.0001</b>
HPTLC Silica Gel 60 F254	20 x 10	200 µm	50 Plates	Glass	<b>4-1.05642.0001</b>

\* Paper box  
\*\* Plastic box



# SOLVENTS & INORGANIC REAGENTS

## Instrumental Analysis Solvents for

HPLC, LC/MS, Spectroscopy/Spectrophotometry, Gas Chromatography, UV/VIS and infrared spectroscopy

### EMPARTA Solvents

- Specification in accordance with newest edition of ACS

### EMSURE Solvents

- Premium grade for all regulated and highly demanding lab applications



## Classical inorganic analysis



**Salts**



**Caustic alkalis and bases**



**Acids**



**Metals and metal oxides**

# CERTIPUR® STANDARD SOLUTIONS

## Parameters A-Z

### Certipur® standard solutions, concentration 1,000 mg/L

Certipur® standard solutions are traceable to standard reference materials from NIST, and accredited according to ISO/IEC 17025 guidelines. They can be easily diluted to different concentrations to suit your needs.

Parameter	Volume	Cat. No.
<b>A</b> Ammonium	500 mL	4-1.19812.0500
Arsenic	100 mL	4-1.19773.0100
<b>B</b> Boron	100 mL	4-1.19500.0100
<b>C</b> Cadmium	100 mL	4-1.19777.0100
Calcium	100 mL	4-1.19778.0100
Chloride	500 mL	4-1.19897.0500
Chromium	100 mL	4-1.19779.0100
Copper	100 mL	4-1.19786.0100
Cyanide	500 mL	4-1.19533.0500
<b>F</b> Fluoride	500 mL	4-1.19814.0500
<b>I</b> Iron	100 mL	4-1.19781.0100
<b>M</b> Magnesium	100 mL	4-1.19788.0100
Manganese	100 mL	4-1.19789.0100
Molybdenum	100 mL	4-1.70227.0100

Parameter	Volume	Cat. No.
<b>N</b> Nickel*	1,000 mL	4-1.09989.0001
Nitrate	500 mL	4-1.19811.0500
Nitrite	500 mL	4-1.19899.0500
<b>P</b> Phosphate	500 mL	4-1.19898.0500
Potassium	100 mL	4-1.70230.0100
<b>S</b> Silicon	100 mL	4-1.70236.0100
Silver	100 mL	4-1.19797.0100
Sulfate	500 mL	4-1.19813.0500
<b>T</b> TOC	100 mL	4-1.09017.0100
<b>V</b> Vanadium	100 mL	4-1.70245.0100
<b>Z</b> Zinc	100 mL	4-1.19806.0100

\* Titrisol®

## NUTRIENT ANALYSIS

Accurate information on protein and fiber content is needed for all food products. To simplify your work, we offer reliable kits for testing dietary fiber, and special reagents for Kjeldahl nitrogen analysis, which is the official method for determining protein content in food.

- Reagent test kits for easy determination of total amount of dietary fiber [Cat. No. 4-1.12979.0001]
- Kjeldahl tablets for nitrogen determination, also offered in micro-scale [Cat. No. 4-1.15348.0250, 4-1.16469.0250, 4-1.18348.0250, 4-1.18469.0250]



# KARL FISCHER REAGENTS



It's important to measure water content in products because it can affect their quality, texture, shelf life, chemical stability and reactivity.

**We offer all products required for Karl Fischer titration:**

- **Volumetric reagents**
- **One-component reagents**
- **Two-component reagents:** special reagents for determining water in aldehydes, ketones and other substances that are difficult to solubilize
- **Coulometric reagents:** special solvents for oils and fats
- **Water standards** for titer determination and instrument monitoring

## Volumetric Titration Reagents

Cat. No.	Description	Pack Size	38 mm Bottle Neck
4-1.88001.1038	COMBITITRANT 1	1 L	38/430 coated
89423-864	COMBITITRANT 2	1 L	38/430 coated
89423-856	COMBITITRANT 2	2.5 L	38/430 coated
89423-872	COMBITITRANT 5	1 L	38/430 glass
89423-868	COMBITITRANT 5	2.5 L	38/430 coated
4-1.88006.1000	COMBITITRANT 5 KETONE	1 L	38/430 coated
89423-874	COMBIMETHANOL	1 L	38/430 glass
89423-876	COMBIMETHANOL	2.5 L	38/430 glass
89423-860	TITRANT 5	1 L	38/430 coated
4-1.88010.2500	TITRANT 5	2.5 L	38/430 coated
89423-862	SOLVENT FOR VOLUMETRIC	1 L	38/430 glass
4--AX1698A-3	COMPOSITE 5	2 L	38/430 coated
4--AX1698A-5	COMPOSITE 5	4 L	38/430 coated
102465-504	COMPOSITE 5	1 L	38/430 coated
4--AX1698B-3	COMPOSITE 2	2 L	38/430 coated
4--AX1698B-5	COMPOSITE 2	4 L	38/430 coated
4--AX1698B-6	COMPOSITE 2	1 L	38/430 coated
4--AX1698D-5	COMPOSITE 5K KETONE	4 L	38/430 coated
4--AX1698D-6	COMPOSITE 5K KETONE	1 L	38/430 coated
4--AX1698E-6	COMPOSITE 2K KETONE	1 L	38/430 coated
4--AX1699B-3	SOLVENT S	2 L	38/430 coated
4--AX1699B-5	SOLVENT S	4 L	38/430 coated
4--AX1699B-6	SOLVENT S	1 L	38/430 coated
VWR Cat. No.	Description	Pack Size	GL-45 Bottle Neck
4-1.88001.1045	COMBITITRANT 1	1 L	GL45 coated
4-1.88002.1045	COMBITITRANT 2	1 L	GL45 coated
4-1.88002.2545	COMBITITRANT 2	2.5 L	GL45 coated
4-1.88005.1045	COMBITITRANT 5	1 L	GL45 coated
4-1.88005.2545	COMBITITRANT 5	2.5 L	GL45 coated
4-1.88006.1045	COMBITITRANT 5 KETONE	1 L	GL45 coated
4-1.88009.1045	COMBIMETHANOL	1 L	GL45 glass
4-1.88010.1045	TITRANT 5	1 L	GL45 glass
4-1.88011.1045	TITRANT 2 TITRANT	1 L	GL45 coated
4-1.88015.1045	SOLVENT FOR VOLUMETRIC	1 L	GL45 glass
4-1.88020.1045	COMBISOLVENT OIL SOLVENT	1 L	GL45 glass

## Coulometric Titration Reagents

Cat. No.	Description	Pack Size	38 mm Bottle Neck
4-AX1697CN-1	COULOMAT C SAFER FORMULATION	25 mL	38/430 glass
4-AX1697CN-30	COULOMAT C SAFER FORMULATION	2 L	38/430 glass
4-AX1697AN-1	COULOMAT A SAFER FORMULATION	500 mL	38/430 coated
4-AX1697AN-4	COULOMAT A SAFER FORMULATION	1 L	38/430 coated
4-AX1697AN-30	COULOMAT A SAFER FORMULATION	4 L	38/430 coated
4-AX1697A-1	COULOMAT A	500 mL	38/430 coated
4-AX1697A-30	COULOMAT A	4 L	38/430 coated
4-AX1697C-1	COULOMAT C	25 mL	38/430 glass
4-AX1697C-30	COULOMAT C	2 L	38/430 coated
4-AX1697E-1	COULOMAT AK ALDEHYDES & KETONE	1 L	38/430 coated
4-AX1697E-30	COULOMAT AK ALDEHYDES & KETONE	4 L	38/430 coated
4-AX1697F-1	COULOMAT CK KETONE	25 mL	38/430 glass
4-AX1699EN-5	SOLVENT KN	4 L	38/430 glass
4-AX1699EN-6	SOLVENT KN	1 L	38/430 glass
4-AX1699M-6	METHANOL ANHYDROUS	1 L	38/430 glass
Cat. No.	Description	Pack Size	GL-45 Bottle Neck
4-1.09257.0500	COMBICOULOMAT SINGLE SOL-FRITLESS	500 mL	GL45 glass
4-1.09255.0500	COMBICOULOMAT SINGLE SOL-FRITTED	500 mL	GL45 glass

## Water Standards for Instrument Calibration

Cat. No.	Description	Pack Size	
4-1.880500010	WATER STANDARD 0.01%	10 x 8 mL	Ampoule
4-1.88051.0010	WATER STANDARD 0.1%	10 x 8 mL	Ampoule
4-1.88052.0010	WATER STANDARD 1%	10 x 8 mL	Ampoule
4-1.88054.0005	WATER STANDARD OVEN	5 g	Solid
4-1.88055.0010	WATER STANDARD FOR OIL SAMPLES	10 x 8 mL	Ampoule

# REFLECTOQUANT® SYSTEMS TAKE YOUR TEST FURTHER

## Mobile accuracy with test strips

The Reflectoquant® system gives you all the tools you need for high quality, low cost analysis. Compact and easy-to-use, the system allows you to monitor raw materials and obtain precise quantitative results.

					Cat. No.
RQflex® 10 Reflectometer					4-1.16970.0001
Test Kits					
Parameter	Graduation	No. of tests	Method	Type	Cat. No
Ascorbic Acid Test	25 – 450 mg/L Ascorbic Acid	50	Phosphormolybd. Blue		4-1.16981.0001
Ascorbic Acid Test RQeasy®	25 – 450 mg/L Ascorbic Acid	50	Phosphormolybd. Blue		4-1.17963.0001
Calcium Test	2.5 – 45.0 mg/L Ca	50	Glyoxal-bis-(2-hydroxyanil)	Reagent, Incl.	4-1.16993.0001
Calcium Test	5 – 125 mg/L Ca	50	Phthalein Complexone		4-1.16125.0001
Glucose Test	1 – 100 mg/L Glucose	50	Enzymatic Reaction		4-1.16720.0001
Hydroxymethylfurfural Test	1.0 – 60.0 mg/L HMF	50	Enzymatic Reaction		4-1.17952.0001
Iron Test	0.5 – 20.0 mg/L Fe(II)	50	Triazine		4-1.16982.0001
Iron Test	20 – 200 mg/L Fe(II)	50	2,2'-Bipyridine		4-1.16983.0001
Lactic Acid Test	3.0 – 60.0 mg/L Lactic Acid	50	Enzymatic Reaction		4-1.16127.0001
Magnesium Test	5 – 100 mg/L Mg	50	Phthalein Complexone		4-1.16124.0001
Malic Acid Test	5.0 – 60.0 mg/L Malic Acid	50	Enzymatic Reaction		4-1.16128.0001
Nitrate Test	3 – 90 mg/L NO <sub>3</sub>	50	Modified Griess' Reaction		4-1.16995.0001
Nitrate Test	5 – 225 mg/L NO <sub>3</sub>	50	Modified Griess' Reaction		4-1.16971.0001
Nitrate Test RQeasy®	5 – 250 mg/L NO <sub>3</sub>	50	Modified Griess' Reaction		4-1.17961.0001
Nitrite Test	0.5 – 25.0 mg/L NO <sub>2</sub>	50	Griess' Reaction		4-1.16973.0001
pH Test	pH 1.0 – 5.0	50	Mixed Indicator		4-1.16894.0001
pH Test	pH 4.0 – 9.0	50	Mixed Indicator		4-1.16996.0001
Phosphate Test	5 – 120 mg/L PO <sub>4</sub>	50	Phosphormolybd. Blue	Reagent, Incl.	4-1.16978.0001
Potassium Test RQflex® Plus	1.0 – 25.0 mg/L K	100	Kalagnost®, Turbidimetric		4-1.17945.0001
Potassium Test	0.25 – 1.20 g/L K	50	Dipicrylamine	Reagent, Incl.	4-1.16992.0001
Sulfite Test	10 – 200 mg/L SO <sub>3</sub>	50	Nitroprusside / Zn-hexacyanoferrate		4-1.16987.0001
Total Hardness Test	0.1 – 30.0 °d	50	Phthalein Complexone		4-1.16997.0001
Total Sugar Test (Glucose and Fructose)	65 – 650 mg/L Total Sugar	50	Enzymatic Reaction	Reagent, Incl.	4-1.16136.0001
Urea Test in Milk Application	0.2 – 7.0 mg/L NH <sub>4</sub>	50	Indophenol Blue	Reagent, Incl.	4-1.16892.0001



Cat. No.

4-1.16970.0001

Test Kits

Beer Processing	Food Testing	Juices	Milk Products	Mineral Water	Soft Drinks
■	■	■	■		■
■	■	■	■		■
■	■	■	■	■	■
■	■	■	■	■	■
	■	■			
	■	■		■	
	■	■		■	
■	■	■	■		■
	■	■		■	
	■	■		■	■
	■	■		■	■
	■	■		■	■
	■	■	■	■	■
	■	■		■	■
■		■		■	■
	■			■	
■	■	■			■
			■		

# MQUANT™ TEST STRIPS SCREEN ON THE GO

Highly reliable and portable, **MQuant™** test strips are designed for semi-quantitative determination of ions and compounds. The test strips save you considerable time and costs during analyses, quality checks and in-process controls. Thanks to the PET film backing material and the low reagent content, the test strips are also easy to dispose of.

it's that  
simple!



## 01 Sample preparation

The MQuant™ Test contains all necessary reagents, including those required for sample pre-treatment.

## 02 Testing



Remove one MQuant™ test strip from the protective tube.



Dip strip into the test solution to wet reaction zones. Remove excess liquid by shaking test strip or drawing it across the edge of the vessel.



After the specified reaction time (maximum one minute), compare the color of the reaction zone with the color scale printed on the tube label to determine the concentration.

## 03 Disposal

MQuant™ test strips can be safely and easily disposed of with regular waste.

### Shelf-life and storage

When stored in a cool (refrigeration is necessary in some cases) and dry area, the test strips can be used up to three years (details printed in the pack). The tube must be closed immediately after removal of each strip to ensure the remaining test strips are protected.

### Quality assurance

We check and calibrate all MQuant™ tests and comparison colors using certified standard solutions. These solutions can be traced directly to primary reference materials from NIST and PTB.

Paramater	Graduation	No. of Tests	Method	Type	Cat. No	Beer Processing	Food Testing	Juices	Milk Products	Mineral Water	Soft Drinks
Aluminium Test	10-25-50-100-250 mg/L Al	100	Aurintricarboxylic Acid	Reagent, Incl.	<b>4-1.10015.0001</b>	■	■	■		■	■
Arsenic Test	0.02-0.05-0.1-0.2-0.5 mg/L As 0.1-0.5-1.0-1.7-3.0 mg/L As	100	Modified Gutzeit Test	Reagent, Incl.	<b>4-1.17917.0001</b>					■	
Ascorbic Acid Test	50-100-200-300-500-700-1,000-2,000 mg/L ascorbic acid	100	Phosphomolybdenum Blue		<b>4-1.10023.0001</b>	■	■	■			■
Calcium Test	10-25-50-100 mg/L Ca	60	Glyoxal-bis-hydroxyanil	Reagent, Incl.	<b>4-1.10083.0001</b>	■	■	■	■	■	■
Carbonate Hardness Test	5-10-15-20-30 °e	100	Mixed Indicator		<b>4-1.10648.0001</b>					■	
Chloride Test	500-1,000-1,500-2,000-≥3,000 mg/L Cl	100	Silver Chromate		<b>4-1.10079.0001</b>		■				
Free Fatty Acids	0.5-1.0-2.0-3.0 mg/g KOH	100	pH Indicator		<b>4-1.17046.0001</b>		■				
Glucose Test	10-25-50-100-250-500 mg/L Glucose	50	Enzymatic Reaction		<b>4-1.17866.0001</b>	■	■	■	■		■
Iron Test	3-10-25-50-100-250-500 mg/L Fe(II)	100	2,2'-Bipyridine		<b>4-1.10004.0001</b>		■	■	■		■
Nitrate Test	10-25-50-100-250-500 mg/L NO3	100	Modified Griess' Reaction		<b>4-1.10020.0001</b>		■	■		■	
Nitrate Test	0.5-1-2-5-10 mg/L NO2	75	Griess' Reaction		<b>4-1.10057.0001</b>		■				
Nitrite Test	2-5-10-20-40-80 mg/L NO2	100	Griess' Reaction		<b>4-1.10007.0001</b>		■				
Peroxidase Test	Yes/No Result	100	Enzymatic Reaction		<b>4-1.17828.0001</b>		■		■		
Peroxidase Test	0.5-2-5-10-25 mg/L H2O2	100	Enzymatic Reaction		<b>4-1.10011.0001</b>				■		
Peroxidase Test	1-3-10-30-100 mg/L H2O2	100	Enzymatic Reaction		<b>4-1.10081.0001</b>				■		
Phosphate Test	10-25-50-100-250-500 mg/L PO4	100	Molybdate Ion	Reagent, Incl.	<b>4-1.10428.0001</b>		■				
Sulfite Test	10-40-80-180-400 mg/L SO3	100	Nitroprusside/ Zn-hexacyanoferrate		<b>4-1.10013.0001</b>		■	■		■	■
Tin Test	10-25-50-100-200 mg/L Sn	50	Toluene-3, 4-dithiol	Reagent, Incl.	<b>4-1.10028.0001</b>		■	■	■		

# MColorpHast™ TEST STRIPS SIMPLY READ THE COLOR... FAST

## pH test strips and papers

MColorpHast™ makes pH measurement easier than ever. No instruments, sample preparation, maintenance, or cleaning electrodes. Simply read the color. The rapid method offers an accurate color scale for clear, reliable results. It's suitable for all types of media in environmental analysis and industrial in-process controls — even for highly turbid liquids. With our broad range of pH tests, you'll always have the optimal solution for your application.

# TAKE THE FAST TRACK

## SAFETYEDGE BOX



### Performing pH measurements?

Enjoy the ultimate in security and simplicity with our SafetyEdge box. Its tamper-proof seal ensures that the box has not been opened, while its innovative flip-top corner allows easy removal of pH indicator strips, but prevents them from falling out.

### Do you have special applications?

Simplify your workflow with our pH test strips for special requirements, like testing turbid samples or meat.

## Shelf-life and storage

- Store at 10 – 25 °C to maintain top condition for 3 – 5 years
- Protect from light and moisture
- Close box immediately after removing each strip or paper



## pH-indicator papers

Product	pH Measuring Range	Graduation	Roll Length	Cat. No.
pH-Box	0.5 – 13.0	0.5–1.0–1.5–2.0–2.5–3.0–3.5–4.0–4.5–5.0–5.5–6.0–6.5–7.0–7.5–8.0–8.5–9.0–9.5–10.0–10.5–11.0–11.5–12.0–12.5–13.0	3 x 4.8 m	<b>4-1.09565.0001</b>
pH-Indicator Paper Universal Indicator	1 – 14	1.0–2.0–3.0–4.0–5.0–6.0–7.0–8.0–9.0–10.0–12.0–14.0	3 x 4.8 m	<b>4-1.10962.0003</b>
pH-Indicator Paper Universal Indicator	1 – 10	1.0–2.0–3.0–4.0–5.0–6.0–7.0–8.0–9.0–10.0	3 x 4.8 m	<b>4-1.09526.0003</b>
pH-Indicator Paper Acilit®	0.5 – 5.0	0.5–1.0–1.5–2.0–2.5–3.0–3.5–4.0–4.5–5.0	3 x 4.8 m	<b>4-1.09560.0003</b>
pH-Indicator Paper Neutralit®	5.5 – 9.0	5.5–6.0–6.5–7.0–7.5–8.0–8.5–9.0	3 x 4.8 m	<b>4-1.09564.0003</b>
pH-Indicator Paper Alkalit®	9.5 – 13.0	9.5–10.0–10.5–11.0–11.5–12.0–12.5–13.0	3 x 4.8 m	<b>4-1.09562.0003</b>

## pH-indicator strips (non-bleeding)

Product	pH Measuring Range	Graduation	No. of Strips	Cat. No.
pH-Indicator Strips Universal Indicator	0 – 14	0–1–2–3–4–5–6–7–8–9–10–11–12–13–14	100	<b>4-1.09535.0001</b>
pH-Indicator Strips	0 – 6.0	0–0.5–1.0–1.5–2.0–2.5–3.0–3.5–4.0–4.5–5.0–5.5–6.0	100	<b>4-1.09531.0001</b>
pH-Indicator Strips	5.0 – 10.0	5.0–5.5–6.0–6.5–7.0–7.5–8.0–8.5–9.0–9.5–10.0	100	<b>4-1.09533.0001</b>
pH-Indicator Strips	7.5 – 14.0	7.5–8.0–8.5–9.0–9.5–10.0–10.5–11.0–11.5–12.0–12.5–13.0–13.5–14.0	100	<b>4-1.09532.0001</b>
pH-Indicator Strips	2.0 – 9.0	2.0–2.5–3.0–3.5–4.0–4.5–5.0–5.5–6.0–6.5–7.0–7.5–8.0–8.5–9.0	100	<b>4-1.09584.0001</b>
pH-Indicator Strips Special Indicator for pH-Measurements in Turbid Solutions (Suspensions)	2.0 – 9.0	2.0–3.0–4.0–5.0–6.0–7.0–8.0–9.0	100	<b>4-1.09502.0001</b>

# MICROBIAL AIR MONITORING

Use our high-precision air samplers to easily and effectively monitor microorganisms in air and compressed gas.

**MAS-100 NT®:** Industry standard for routine air monitoring  
[Cat. No. 4-1.09191.0001]

**MAS-100® Eco Airsampler:** Economical, small, and lightweight microbial air sampler  
[Cat. No. 4-1.09227.0001]



## A SUPERIOR SOLUTION TO SAFETY

Granulated Media from MilliporeSigma



No dust, no inhalation risk, no mess — just quick, easy preparation of high quality media.

Description	Pkg Size	Cat. No.
LB Agar MILLER	500 g	4-1.10283.0500
LB Broth MILLER	500 g	4-1.10285.0500
Terrific Broth	500 g	4-1.01629.0500
Tryptic Soy Agar	500 g	4-1.05458.0500
Tryptic Soy Broth	500 g	4-1.05459.0500
Tryptone, Pancreatic	1 kg	4-1.07213.1000
Yeast Extract	500 g	4-1.03753.0500

